


## 不良品切断模块 Bad Crimp Cutter

### » 产品介绍 Introduction

该装置用于在线切断不良的压接，它时刻侦测压力管理装置（CFM）提供的输出信号，并在不良压接产生的第一时间迅速将导线切断，防止操作者将不良品混放在良品区，最大程度防止不良品的误用，是保证压接质量不可缺少的一款“利器”。该装置由压缩空气驱动，无需连接电源。

This device is used for cutting bad crimps on-line, it detects signals output by CFM all time. When bad crimping occurs, it will cut off wire quickly to prevent the operator to put bad ones in the qualified zone, the weapon to ensure crimping quality. The device is drove by compressed air, power supply not needed.

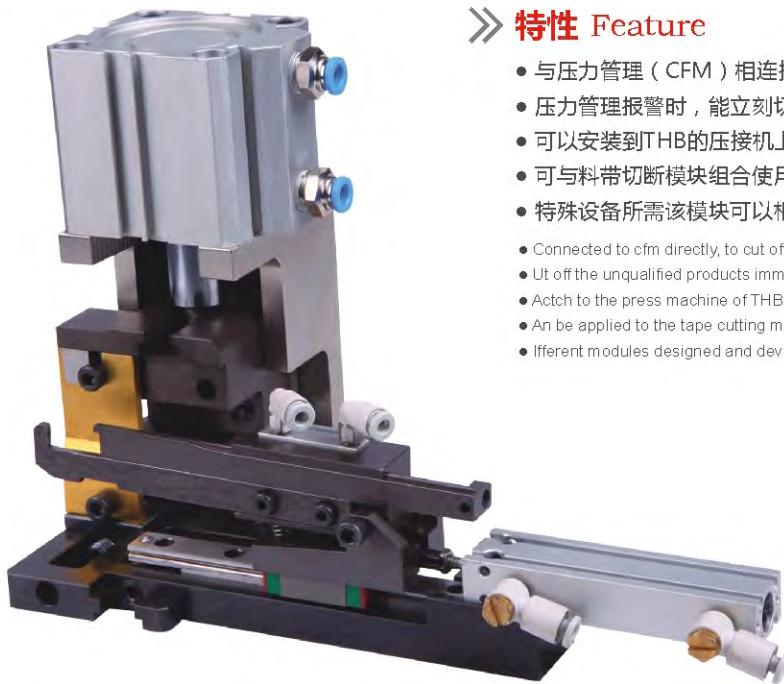

### » 特性 Feature

- 与压力管理（CFM）相连接，用于切除压接不合格的电缆；
- 压力管理报警时，能立刻切断不良品，保证产品品质；
- 可以安装到THB的压接机上；
- 可与料带切断模块组合使用；
- 特殊设备所需该模块可以根据具体情况而单独设计开发。
- Connected to cfm directly, to cut off unqualified cables;
- Ut off the unqualified products immediately the cfm alarm, to ensure high quality;
- Atch to the press machine of THB brand;
- An be applied to the tape cutting module;
- lfferent modules designed and developed according to special equipments.

### » 技术参数 Specification

型号	Type	YJFJ-060
气源	Gas source	5~6Bar
适应线径范围	Wire rang	≤6mm <sup>2</sup>